

## Environmental Product Declaration (EPD)

According to ISO 14025 and EN  
15804+A2:2019

# Sanitary partitions and furniture made of HPL

Registration number:

EPD-Kiwa-EE-235127-EN

Issue date:

18-05-2026

Valid until:

18-05-2031

Declaration owner:

Schäfer Trennwandsysteme  
GmbH

Publisher:

Kiwa-Ecobility Experts


Programme operator:

Kiwa-Ecobility Experts

Status:

verified

kiwa

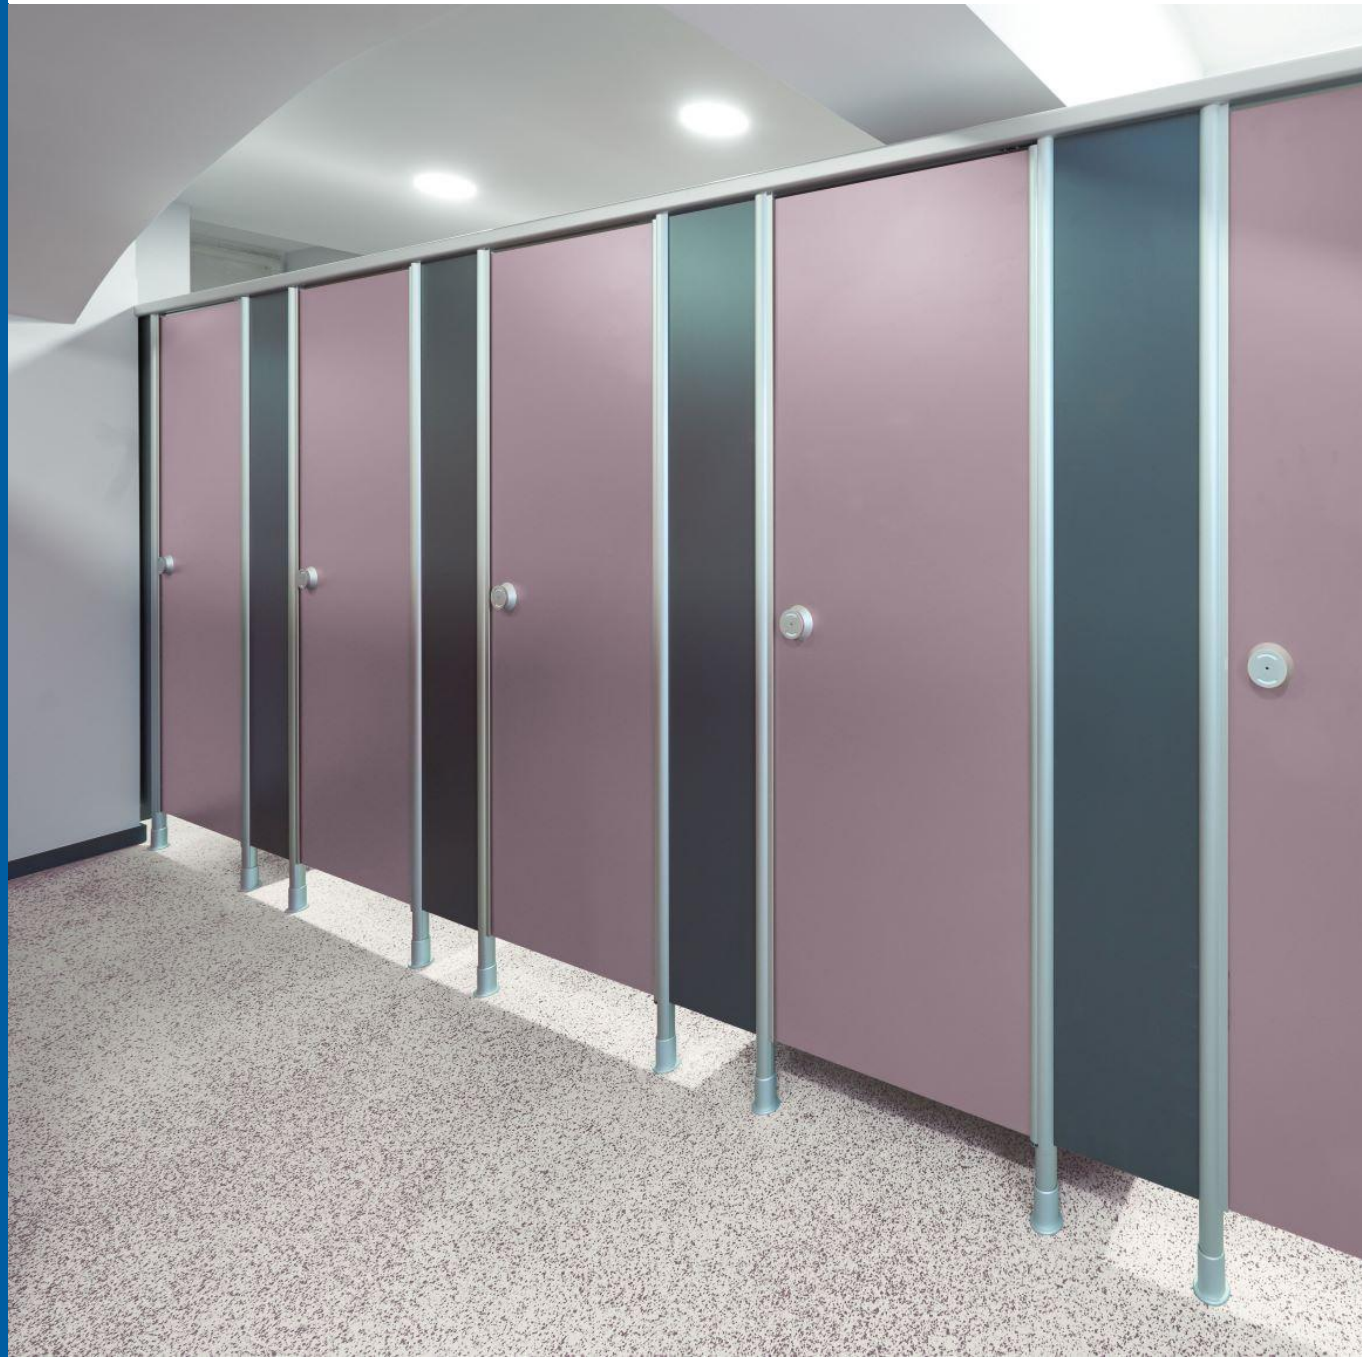

## 1 General information

### 1.1 PRODUCT

Sanitary partitions and furniture made of HPL

### 1.2 REGISTRATION NUMBER

EPD-Kiwa-EE-235127-EN

### 1.3 VALIDITY

**Issue date:** 18-05-2026

**Valid until:** 18-05-2031


### 1.4 PROGRAMME OPERATOR

Kiwa-Ecobility Experts  
Wattstraße 11-13  
13355 Berlin  
DE



Raoul Mancke

*(Head of programme operations, Kiwa-Ecobility Experts)*



Dr. Ronny Stadie

*(Verification body, Kiwa-Ecobility Experts)*

### 1.5 OWNER OF THE DECLARATION

**Declaration owner:** Schäfer Trennwandsysteme GmbH

**Address:** Industriepark 37, 56593 Horhausen, Germany

**E-mail:** info@schaefer-tws.de

**Website:** www.schaefer-tws.de

**Production location:** Schäfer Trennwandsysteme GmbH

**Address production location:** Industriepark 37, 56593 Horhausen, Germany

### 1.6 VERIFICATION OF THE DECLARATION

The independent verification is in accordance with the ISO 14025:2011. The LCA is in compliance with ISO 14040:2006 and ISO 14044:2006. The EN 15804+A2:2019 serves as the core PCR.

Internal  External



Lucas Pedro Berman, Senda

### 1.7 STATEMENTS

The owner of this EPD shall be liable for the underlying information and evidence. The programme operator Kiwa-Ecobility Experts shall not be liable with respect to manufacturer data, life cycle assessment data and evidence.

### 1.8 PRODUCT CATEGORY RULES

#### Kiwa-EE GPI R.3.0 (2025)

Kiwa-Ecobility Experts, General Programme Instructions "Product Level", SOP EE 1201\_R.3.0 (03.06.2025)

#### Kiwa-EE GPI R.3.0 Annex B1 (2025)

Kiwa-Ecobility Experts, General Programme Instructions "Product Level" – Annex B1 Environmental Information Programme according to EN 15804 / ISO 21930, SOP EE 1203\_R.3.0 (03.06.2025)

## 1 General information

### 1.9 COMPARABILITY

In principle, a comparison or assessment of the environmental impacts of different products is only possible if they have been prepared in accordance with EN 15804+A2:2019. For the evaluation of the comparability, the following aspects have to be considered in particular: PCR used, functional or declared unit, geographical reference, the definition of the system boundary, declared modules, data selection (primary or secondary data, background database, data quality), scenarios used for use and disposal phases, and the life cycle inventory (data collection, calculation methods, allocations, validity period). PCRs and general program instructions of different EPD program operators may differ. Comparability needs to be evaluated. For further guidance, see EN 15804+A2:2019 and ISO 14025.

### 1.10 CALCULATION BASIS

**LCA method R<THINK:** Ecobility Experts | EN15804+A2

**LCA software\*:** Simapro 9.6

**Characterization method:** RETHINK characterization method (see references for more details)

**LCA database profiles:** ecoinvent (for version see references)

**Version database:** v3.20f (20260507)

*\* Simapro is used for calculating the characterized results of the Environmental profiles within R<THINK.*

### 1.11 LCA BACKGROUND REPORT

This EPD is generated on the basis of the LCA background report 'Sanitary partitions and furniture made of HPL' with the calculation identifier ReTHiNK-135127.

## 2 Product

### 2.1 PRODUCT DESCRIPTION

This Environmental Product Declaration applies to the product family VK13, VK13 Kiga, VKH13, GVKF, VKW, Vitrum GS and S20.


The Life Cycle Assessment is based on the product type VK13, which has been selected as the worst-case reference product within this product family. VK13 was chosen because it has the greatest mass among the declared variants and therefore represents the worst option from an environmental impact perspective.

The product is manufactured from high-pressure laminate (HPL) in combination with extruded, anodized or powder-coated aluminium profiles and fittings made of aluminium or stainless steel.

#### Product specification

The composition of the product is described in the following table:

Materials	Weight (%)
Panels / HPL panels	approx. 93.1
Aluminium	approx. 3.4
Other hardware components / locking system	approx. 1.6
Glass / mirror	approx. 1.5
Steel	approx. 0.3
Adhesive / sealant / silicone	approx. 0.1
Synthetic rubber	< 0.1
Plastic plugs / caps	< 0.1

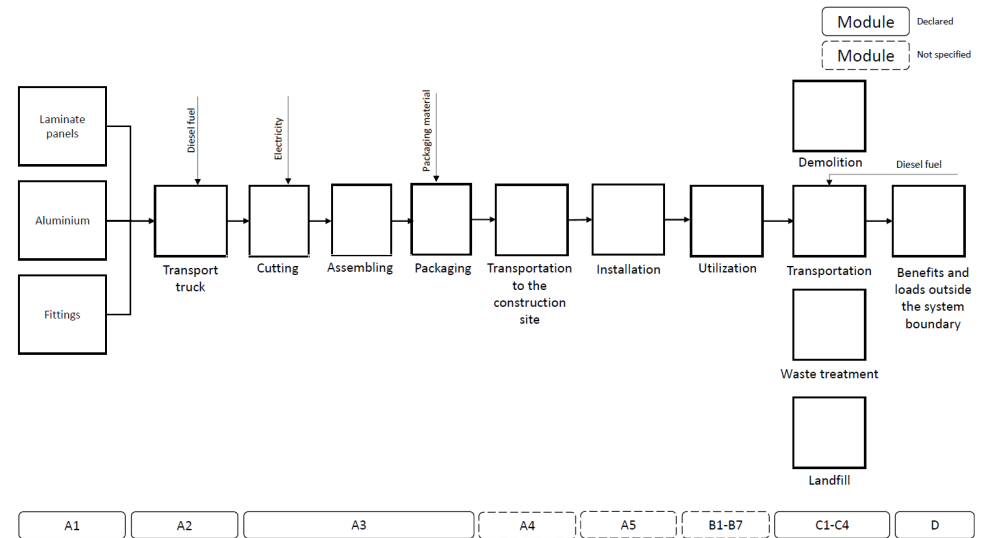

### 2.2 APPLICATION (INTENDED USE OF THE PRODUCT)

WC partitions, cloakroom lockers, vanity tops and furniture are typically used in public or semi-public areas to separate compartments for toilet use in large sanitary facilities, store clothes during sports, swimming or work activities or store working or hygienic materials.

### 2.3 REFERENCE SERVICE LIFE

#### RSL PRODUCT

As the use phase is not declared in this EPD, there is no need to specify a reference service life.

#### USED RSL (YR) IN THIS LCA CALCULATION:

20

### 2.4 SUBSTANCES OF VERY HIGH CONCERN

The product does not contain any substances of very high concern.

## 2 Product

### 2.5 DESCRIPTION PRODUCTION PROCESS

For production, high pressure laminate (HPL) panels are cut to size according to the specific dimensions of the project and processed using CNC machines. At the same time,

the aluminium profiles are cut to size and CNC machined. In the final assembly stage, the profiles, panels and fittings are joined together. The product is prepared as far as possible for final assembly on site.

### 3 Calculation rules

#### 3.1 DECLARED UNIT

m2

This Environmental Product Declaration represents the product type VK13. As VK13 represents the worst-case scenario among the considered product types, it conservatively covers the product types VK13, VK13 Kiga, VKH13, GVKF, Vitrum GS, and S20.

Reference unit: square meter (m2)

#### 3.2 CONVERSION FACTORS

Description	Value	Unit
Reference unit	1	m2
Weight per reference unit	18.858	kg
Conversion factor to 1 kg	0.053027	m2

#### 3.3 SCOPE OF DECLARATION AND SYSTEM BOUNDARIES

This is a Cradle to gate with modules C1-C4 and module D EPD. The life cycle stages included are as shown below:

(X = module included, ND = module not declared)

A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X

The modules of the EN 15804 contain the following:

Module A1 = Raw material supply	Module B5 = Refurbishment
Module A2 = Transport	Module B6 = Operational energy use
Module A3 = Manufacturing	Module B7 = Operational water use
Module A4 = Transport	Module C1 = De-construction / Demolition
Module A5 = Construction - Installation process	Module C2 = Transport
Module B1 = Use	Module C3 = Waste Processing
Module B2 = Maintenance	Module C4 = Disposal
Module B3 = Repair	Module D = Benefits and loads beyond the product system boundaries
Module B4 = Replacement	

#### 3.4 REPRESENTATIVENESS

This EPD is representative for sanitary partitions made of HPL, a product of Schäfer Trennwandsysteme GmbH. The results of this EPD are representative for the European Union.

#### 3.5 CUT-OFF CRITERIA

##### Product stage (A1-A3)

All input flows (e.g. raw materials, transportation, energy use, packaging, etc.) and output flows (e.g. production waste) are considered in this LCA. The total neglected input flows do

### 3 Calculation rules

therefore not exceed the limit of 5% of energy use and mass.

Excluded processes are:

- Long-term emissions
- The manufacture of equipment used in production, buildings or any other capital goods;
- The transport of personnel to the plant;
- The transportation of personnel within the plant;
- Research and development activities

#### End of life stage (C1-C4)

All input flows (e.g. energy use for demolition or disassembly, transport to waste processing, etc.) and output flows (e.g. end-of-life waste processing of the product, etc.) are considered in this LCA. The total neglected input flows do therefore not exceed the limit of 5% of energy use and mass.

#### Benefits and loads beyond the system boundary (Module D)

All benefits and loads beyond the system boundary resulting from reusable products, recyclable materials and/or useful energy carriers leaving the product system are considered in this LCA.

### 3.6 ALLOCATION

Allocations were avoided as far as possible. There are no coproducts or by-products in the manufacturing of the examined product. Based on energy consumption measurements, the energy requirements of the production were allocated to the individual products. Specific information about allocations within the background data is included in the documentation of the ecoinvent datasets.

### 3.7 DATA COLLECTION & REFERENCE PERIOD

All process-specific data refer to the data collection period from 01/2024 to 12/2024.

### 3.8 ESTIMATES AND ASSUMPTIONS

The material inputs in kg/m<sup>2</sup> were calculated by dividing the total mass per installation, consisting of 10 VK13 changing cubicles, by the total panel area of approximately 62.5 m<sup>2</sup> per installation. This corresponds to a conversion factor of approximately  $1/62.5 = 0.0160$ .

All datasets chosen for the LCA refer to Europe as the geographic reference.

A dataset for a non-specific truck was used for module A2.

For the end-of-life, waste scenarios from the Dutch Environmental Database (Nationale Milieudatabase (NMD)) were used.

This EPD is developed in accordance with EN 15804 and applies the Polluter Pays Principle, assigning environmental impacts to the responsible entity, and the Modularity Principle, ensuring that impacts are reported in the specific life cycle stage in which they occur—supporting transparency, accountability, and comparability across product systems.

### 3.9 DATA QUALITY

The quality level of geographical representativeness can be considered “good”.

The quality level of technical representativeness can be considered “good”.

The time representativeness can also be regarded as “good”.

The overall data quality for this EPD can, therefore, be described as “good”. All relevant process-specific data were collected during data collection.

In all possible cases, primary data from customers was used, which has very good data quality because it comes directly from the source. In addition, secondary data from the ecoinvent database (2022, version 3.9.1) was used when no primary data could be supplied. The database is checked regularly and, therefore, meets the requirements of DIN EN ISO 14040/44 (background data not older than 10 years). The background data meets the requirements of EN 15804+A2. The quantities of raw materials, consumables and supplies used and the energy consumption were recorded and averaged over the entire operating year.

The general rule that specific data from certain production processes or average data derived from certain processes must take precedence when calculating an EPD or LCA was adhered to. Data for processes over which the manufacturer has no influence were assigned to generic data/scenarios. When selecting these, care was taken to always choose the data set/scenario that most realistically represents the processes. Thus, the scenarios included are currently in use and are representative for one of the most likely scenario alternatives.

### 3.10 POWER MIX

The electricity input was modelled using the German residual electricity mix (“Electricity (DE) – low voltage (max 1 kV), residual mix” from ecoinvent 3.9.1) with a global warming potential of 0.725 kg CO<sub>2</sub> eq/kWh, applying a market-based approach.

## 4 Scenarios and additional technical information

### 4.1 DE-CONSTRUCTION, DEMOLITION (C1)

No inputs are needed for the product at the de-construction / demolition phase

### 4.2 TRANSPORT END-OF-LIFE (C2)

The following distances and transport conveyance are assumed for transportation during end of life for the different types of waste processing.

Waste Scenario	Transport conveyance	Not removed (stays in work) [km]	Landfill [km]	Incineration [km]	Recycling [km]	Re-use [km]
(ei3.9.1) Metals, others (i.a. fasteners, fittings) (NMD ID 50)	(ei3.9.1) Lorry (Truck), unspecified (default)   market group for (GLO)	0	100	150	50	50
(ei3.9.1) aluminium (GLO), wrought alloy for buildings (i.a. profiles, sheets, pipes) (NMD ID 5)	(ei3.9.1) Lorry (Truck), unspecified (default)   market group for (GLO)	0	100	150	50	50
(ei3.9.1) polyolefines (i.a. pe,pp) (i.a. pipes, foils) (NMD ID 57)	(ei3.9.1) Lorry (Truck), unspecified (default)   market group for (GLO)	0	100	150	50	50
(ei3.9.1) glass (i.a. flat glass) (NMD ID 28)	(ei3.9.1) Lorry (Truck), unspecified (default)   market group for (GLO)	0	100	150	50	50
(ei3.9.1) aluminium (GLO), cast alloy for buildings (i.a. profiles, sheets, pipes) (NMD ID 4)	(ei3.9.1) Lorry (Truck), unspecified (default)   market group for (GLO)	0	100	150	50	50
(ei3.9.1) elastomeres (i.a. epdm) (i.a. roofing, foils) (NMD ID 20)	(ei3.9.1) Lorry (Truck), unspecified (default)   market group for (GLO)	0	100	150	50	50
(ei3.9.1) finishes (adhered to wood, plastic, metal) (NMD ID 2)	(ei3.9.1) Lorry (Truck), unspecified (default)   market group for (GLO)	0	100	150	50	50
(ei3.9.1) board material, 'contaminated' (large parts i.a. covering) (NMD ID 56)   (u=10%, glue=12%) corr. acc. EN16449	(ei3.9.1) Lorry (Truck), unspecified (default)   market group for (GLO)	0	100	150	50	50

The transport conveyance(s) used in the scenario(s) for transport during end of life has the following characteristics.

	Value and unit
Vehicle type used for transport	(ei3.9.1) Lorry (Truck), unspecified (default)   market group for (GLO)
Fuel type and consumption of vehicle	not available

## 4 Scenarios and additional technical information

Capacity utilisation (including empty returns)	50 % (loaded up and return empty)
Bulk density of transported products	inapplicable
Volume capacity utilisation factor	1

### 4.3 END OF LIFE (C3, C4)

The scenario(s) assumed for end of life of the product are given in the following tables. First the assumed percentages per type of waste processing are displayed, followed by the assumed amounts.

Waste Scenario	Region	Not removed (stays in work) [%]	Landfill [%]	Incineration [%]	Recycling [%]	Re-use [%]
(ei3.9.1) Metals, others (i.a. fasteners, fittings) (NMD ID 50)	NL	0	5	5	90	0
(ei3.9.1) aluminium (GLO), wrought alloy for buildings (i.a. profiles, sheets, pipes) (NMD ID 5)	NL	0	3	3	94	0
(ei3.9.1) polyolefines (i.a. pe,pp) (i.a. pipes, foils) (NMD ID 57)	NL	0	10	85	5	0
(ei3.9.1) glass (i.a. flat glass) (NMD ID 28)	NL	0	30	0	70	0
(ei3.9.1) aluminium (GLO), cast alloy for buildings (i.a. profiles, sheets, pipes) (NMD ID 4)	NL	0	3	3	94	0
(ei3.9.1) elastomeres (i.a. epdm) (i.a. roofing, foils) (NMD ID 20)	NL	0	10	85	5	0
(ei3.9.1) finishes (adhered to wood, plastic, metal) (NMD ID 2)	NL	0	0	100	0	0
(ei3.9.1) board material, 'contaminated' (large parts i.a. covering) (NMD ID 56)   (u=10%, glue=12%) corr. acc. EN16449	NL	0	5	95	0	0

Waste Scenario	Not removed (stays in work) [kg]	Landfill [kg]	Incineration [kg]	Recycling [kg]	Re-use [kg]
(ei3.9.1) Metals, others (i.a. fasteners, fittings) (NMD ID 50)	0.000	0.001	0.001	0.018	0.000
(ei3.9.1) aluminium (GLO), wrought alloy for buildings (i.a. profiles, sheets, pipes) (NMD ID 5)	0.000	0.028	0.028	0.887	0.000
(ei3.9.1) polyolefines (i.a. pe,pp) (i.a. pipes, foils) (NMD ID 57)	0.000	0.000	0.001	0.000	0.000
(ei3.9.1) glass (i.a. flat glass) (NMD ID 28)	0.000	0.086	0.000	0.201	0.000
(ei3.9.1) aluminium (GLO), cast alloy for buildings (i.a. profiles, sheets, pipes) (NMD ID 4)	0.000	0.001	0.001	0.021	0.000
(ei3.9.1) elastomeres (i.a. epdm) (i.a. roofing, foils) (NMD ID 20)	0.000	0.001	0.007	0.000	0.000
<b>Total</b>	<b>0.000</b>	<b>0.995</b>	<b>16.736</b>	<b>1.128</b>	<b>0.000</b>

## 4 Scenarios and additional technical information

Waste Scenario	Not removed (stays in work) [kg]	Landfill [kg]	Incineration [kg]	Recycling [kg]	Re-use [kg]
(ei3.9.1) finishes (adhered to wood, plastic, metal) (NMD ID 2)	0.000	0.000	0.025	0.000	0.000
(ei3.9.1) board material, 'contaminated' (large parts i.a. covering) (NMD ID 56)   (u=10%, glue=12%) corr. acc. EN16449	0.000	0.877	16.672	0.000	0.000
<b>Total</b>	<b>0.000</b>	<b>0.995</b>	<b>16.736</b>	<b>1.128</b>	<b>0.000</b>

### 4.4 BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARY (D)

The presented Benefits and loads beyond the system boundary in this EPD are based on the following calculated Net output flows in kilograms and Energy recovery displayed in MJ Lower Heating Value.

Waste Scenario	Net output flow [kg]	Energy recovery [MJ]
(ei3.9.1) Metals, others (i.a. fasteners, fittings) (NMD ID 50)	0.009	0.000
(ei3.9.1) aluminium (GLO), wrought alloy for buildings (i.a. profiles, sheets, pipes) (NMD ID 5)	0.887	0.000
(ei3.9.1) polyolefines (i.a. pe,pp) (i.a. pipes, foils) (NMD ID 57)	0.000	0.043
(ei3.9.1) glass (i.a. flat glass) (NMD ID 28)	0.131	0.000
(ei3.9.1) aluminium (GLO), cast alloy for buildings (i.a. profiles, sheets, pipes) (NMD ID 4)	0.021	0.000
(ei3.9.1) elastomeres (i.a. epdm) (i.a. roofing, foils) (NMD ID 20)	0.000	0.196
(ei3.9.1) finishes (adhered to wood, plastic, metal) (NMD ID 2)	0.000	0.682
(ei3.9.1) board material, 'contaminated' (large parts i.a. covering) (NMD ID 56)   (u=10%, glue=12%) corr. acc. EN16449	0.000	233.248
<b>Total</b>	<b>1.049</b>	<b>234.171</b>

## 5 Results

For the impact assessment long-term emissions (>100 years) are not considered. The results of the impact assessment are only relative statements that do not make any statements about end-points of the impact categories, exceedance of threshold values, safety margins or risks. The following tables show the results of the indicators of the impact assessment, of the use of resources as well as of waste and other output flows.

### 5.1 ENVIRONMENTAL IMPACT INDICATORS PER SQUARE METER

#### CORE ENVIRONMENTAL IMPACT INDICATORS EN 15804+A2

Abbr.	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> eq.	3.23E+1	1.20E+0	3.58E+0	3.70E+1	0.00E+0	3.97E-1	2.50E+1	1.36E+0	-1.79E+1
GWP-f	kg CO <sub>2</sub> eq.	3.20E+1	1.19E+0	4.56E+0	3.77E+1	0.00E+0	3.96E-1	5.23E-1	1.21E-2	-1.78E+1
GWP-b	kg CO <sub>2</sub> eq.	1.77E-1	3.74E-4	-9.77E-1	-8.00E-1	0.00E+0	1.29E-4	2.45E+1	1.35E+0	-2.65E-2
GWP-luluc	kg CO <sub>2</sub> eq.	8.92E-2	3.94E-3	1.75E-3	9.49E-2	0.00E+0	1.41E-3	3.07E-4	6.45E-6	-5.94E-2
ODP	kg CFC 11 eq.	1.42E-6	2.09E-8	6.47E-8	1.50E-6	0.00E+0	7.04E-9	1.16E-8	2.95E-9	-2.98E-7
AP	mol H <sup>+</sup> eq.	2.13E-1	8.41E-3	1.29E-2	2.35E-1	0.00E+0	1.89E-3	6.29E-3	9.36E-5	-1.40E-1
EP-fw	kg P eq.	1.20E-3	1.12E-5	2.33E-4	1.44E-3	0.00E+0	3.94E-6	8.75E-6	3.10E-7	-6.65E-4
EP-m	kg N eq.	3.55E-2	2.77E-3	2.64E-3	4.09E-2	0.00E+0	7.20E-4	2.63E-3	5.49E-5	-2.62E-2
EP-T	mol N eq.	4.44E-1	2.99E-2	3.04E-2	5.04E-1	0.00E+0	7.68E-3	3.01E-2	3.30E-4	-3.39E-1
POCP	kg NMVOC eq.	1.44E-1	9.58E-3	9.82E-3	1.63E-1	0.00E+0	2.62E-3	8.12E-3	1.19E-4	-8.47E-2
ADP-mm	kg Sb-eq.	2.15E-4	3.50E-6	2.40E-5	2.42E-4	0.00E+0	1.24E-6	6.47E-6	1.54E-8	8.13E-5
ADP-f	MJ	4.09E+2	1.68E+1	7.14E+1	4.97E+2	0.00E+0	5.67E+0	3.63E+0	2.56E-1	-1.70E+2
WDP	m <sup>3</sup> world eq.	1.46E+1	8.77E-2	2.44E-1	1.49E+1	0.00E+0	3.10E-2	6.66E-2	1.06E-2	-1.79E+0

**GWP-total**=Global Warming Potential total (GWP-total) | **GWP-f**=Global Warming Potential fossil fuels (GWP-fossil) | **GWP-b**=Global Warming Potential biogenic (GWP-biogenic) | **GWP-luluc**=Global Warming Potential land use and land use change (GWP-luluc) | **ODP**=Depletion potential of the stratospheric ozone layer (ODP) | **AP**=Acidification potential, Accumulated Exceedance (AP) | **EP-fw**=Eutrophication potential, fraction of nutrients reaching freshwater end compartment (EP-freshwater) | **EP-m**=Eutrophication potential, fraction of nutrients reaching marine end compartment (EP-marine) | **EP-T**=Eutrophication potential, Accumulated Exceedance (EP-terrestrial) | **POCP**=Formation potential of tropospheric ozone (POCP) | **ADP-mm**=Abiotic depletion potential for non fossil resources (ADP mm) | **ADP-f**=Abiotic depletion for fossil resources potential (ADP fossil) | **WDP**=Water (user) deprivation potential, deprivation-weighted water consumption (WDP)

## 5 Results

### ADDITIONAL ENVIRONMENTAL IMPACT INDICATORS EN 15804+A2

Abbr.	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PM	disease incidence	3.97E-6	1.10E-7	6.22E-8	4.14E-6	0.00E+0	3.91E-8	6.01E-8	1.76E-9	-1.86E-6
IR	kBq U235 eq.	7.79E-1	6.33E-3	1.96E-1	9.82E-1	0.00E+0	2.21E-3	7.34E-3	9.13E-4	-1.12E-1
ETP-fw	CTUe	1.44E+2	1.21E+1	1.23E+1	1.68E+2	0.00E+0	4.18E+0	1.05E+1	3.53E-1	-5.33E+1
HTP-c	CTUh	1.22E-7	6.20E-10	2.31E-9	1.25E-7	0.00E+0	2.10E-10	5.96E-8	6.76E-12	-2.44E-8
HTP-nc	CTUh	5.65E-6	1.28E-8	5.59E-8	5.72E-6	0.00E+0	4.55E-9	1.72E-8	1.94E-10	-3.12E-7
SQP	Pt	1.35E+3	1.23E+1	9.06E+1	1.46E+3	0.00E+0	4.47E+0	2.34E+0	5.82E-1	-6.56E+2

**PM**=Potential incidence of disease due to PM emissions (PM) | **IR**=Potential Human exposure efficiency relative to U235 (IRP) | **ETP-fw**=Potential Comparative Toxic Unit for ecosystems (ETP-fw) | **HTP-c**=Potential Comparative Toxic Unit for humans (HTP-c) | **HTP-nc**=Potential Comparative Toxic Unit for humans (HTP-nc) | **SQP**=Potential soil quality index (SQP)

### CLASSIFICATION OF DISCLAIMERS TO THE DECLARATION OF CORE AND ADDITIONAL ENVIRONMENTAL IMPACT INDICATORS

ILCD classification	Indicator	Disclaimer
ILCD type / level 1	Global warming potential (GWP)	None
	Depletion potential of the stratospheric ozone layer (ODP)	None
	Potential incidence of disease due to PM emissions (PM)	None
ILCD type / level 2	Acidification potential, Accumulated Exceedance (AP)	None
	Eutrophication potential, Fraction of nutrients reaching freshwater end compartment (EP-freshwater)	None
	Eutrophication potential, Fraction of nutrients reaching marine end compartment (EP-marine)	None
	Eutrophication potential, Accumulated Exceedance (EP-terrestrial)	None
	Formation potential of tropospheric ozone (POCP)	None
	Potential Human exposure efficiency relative to U235 (IRP)	1
ILCD type / level 3	Abiotic depletion potential for non-fossil resources (ADP-minerals&metals)	2
	Abiotic depletion potential for fossil resources (ADP-fossil)	2
	Water (user) deprivation potential, deprivation-weighted water consumption (WDP)	2
	Potential Comparative Toxic Unit for ecosystems (ETP-fw)	2
	Potential Comparative Toxic Unit for humans (HTP-c)	2
	Potential Comparative Toxic Unit for humans (HTP-nc)	2

## 5 Results

ILCD classification	Indicator	Disclaimer
	Potential Soil quality index (SQP)	2
<p><b>Disclaimer 1</b> – This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.</p>		
<p><b>Disclaimer 2</b> – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.</p>		

### 5.2 INDICATORS DESCRIBING RESOURCE USE AND ENVIRONMENTAL INFORMATION BASED ON LIFE CYCLE INVENTORY (LCI)

#### PARAMETERS DESCRIBING RESOURCE USE

Abbr.	Unit	A1	A2	A3	A1- A3	C1	C2	C3	C4	D
PERE	MJ	5.61E+1	2.29E-1	8.01E+0	6.44E+1	0.00E+0	8.01E-2	3.07E-1	8.48E-3	-1.67E+2
PERM	MJ	2.46E+2	0.00E+0	8.22E+0	2.54E+2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
PERT	MJ	3.02E+2	2.29E-1	1.62E+1	3.18E+2	0.00E+0	8.01E-2	3.07E-1	8.48E-3	-1.67E+2
PENRE	MJ	4.08E+2	1.69E+1	6.97E+1	4.95E+2	0.00E+0	5.68E+0	3.64E+0	2.56E-1	-1.70E+2
PENRM	MJ	9.67E-1	0.00E+0	1.64E+0	2.61E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	-1.38E-2
PENRT	MJ	4.09E+2	1.69E+1	7.14E+1	4.97E+2	0.00E+0	5.68E+0	3.64E+0	2.56E-1	-1.70E+2
SM	Kg	6.33E-2	0.00E+0	0.00E+0	6.33E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
RSF	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
NRSF	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
FW	m <sup>3</sup>	4.47E-1	3.86E-3	4.32E-2	4.94E-1	0.00E+0	1.37E-3	9.22E-3	2.71E-4	-8.80E-2

**PERE**=Use of renewable primary energy excluding renewable primary energy resources used as raw materials | **PERM**=Use of renewable primary energy resources used as raw materials | **PERT**=Total use of renewable primary energy resources | **PENRE**=Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials | **PENRM**=Use of non-renewable primary energy resources used as raw materials | **PENRT**=Total use of non-renewable primary energy resources | **SM**=Use of secondary material | **RSF**=Use of renewable secondary fuels | **NRSF**=Use of non-renewable secondary fuels | **FW**=Net use of fresh water

## 5 Results

### OTHER ENVIRONMENTAL INFORMATION DESCRIBING WASTE CATEGORIES

Abbr.	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
HWD	Kg	1.09E-3	1.05E-4	9.72E-5	1.29E-3	0.00E+0	3.61E-5	6.02E-3	3.14E-7	7.67E-3
NHWD	Kg	5.59E+0	1.03E+0	2.67E-1	6.89E+0	0.00E+0	3.75E-1	1.70E+1	9.97E-1	-3.50E+0
RWD	Kg	7.64E-4	3.70E-6	2.57E-4	1.02E-3	0.00E+0	1.30E-6	5.37E-6	1.36E-6	-7.47E-5

**HWD**=Hazardous waste disposed | **NHWD**=Non-hazardous waste disposed | **RWD**=Radioactive waste disposed

### ENVIRONMENTAL INFORMATION DESCRIBING OUTPUT FLOWS

Abbr.	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
CRU	Kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
MFR	Kg	6.84E-5	0.00E+0	0.00E+0	6.84E-5	0.00E+0	0.00E+0	1.13E+0	0.00E+0	8.87E-1
MER	Kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
EET	MJ	2.89E-3	0.00E+0	0.00E+0	2.89E-3	0.00E+0	0.00E+0	0.00E+0	0.00E+0	7.26E+1
EEE	MJ	1.60E-3	0.00E+0	0.00E+0	1.60E-3	0.00E+0	0.00E+0	0.00E+0	0.00E+0	4.22E+1

**CRU**=Components for re-use | **MFR**=Materials for recycling | **MER**=Materials for energy recovery | **EET**=Exported Energy, Thermic | **EEE**=Exported Energy, Electric

## 5 Results

### 5.3 INFORMATION ON BIOGENIC CARBON CONTENT PER SQUARE METER

#### BIOGENIC CARBON CONTENT

The following Information describes the biogenic carbon content in (the main parts of) the product at the factory gate per square meter:


Biogenic carbon content	Amount	Unit
Biogenic carbon content in the product	8.336	kg C
Biogenic carbon content in accompanying packaging	0.2687	kg C

#### UPTAKE OF BIOGENIC CARBON DIOXIDE

The following amount of carbon dioxide uptake is taken into account. Related uptake and release of carbon dioxide in downstream processes are not taken into account in this number although they do appear in the presented results. One kilogram of biogenic Carbon content is equivalent to 44/12 kg of biogenic carbon dioxide uptake.

Uptake Biogenic Carbon dioxide	Amount	Unit
product	30.54	kg CO2 (biogenic)
Packaging	0.9853	kg CO2 (biogenic)

## 6 Interpretation of results

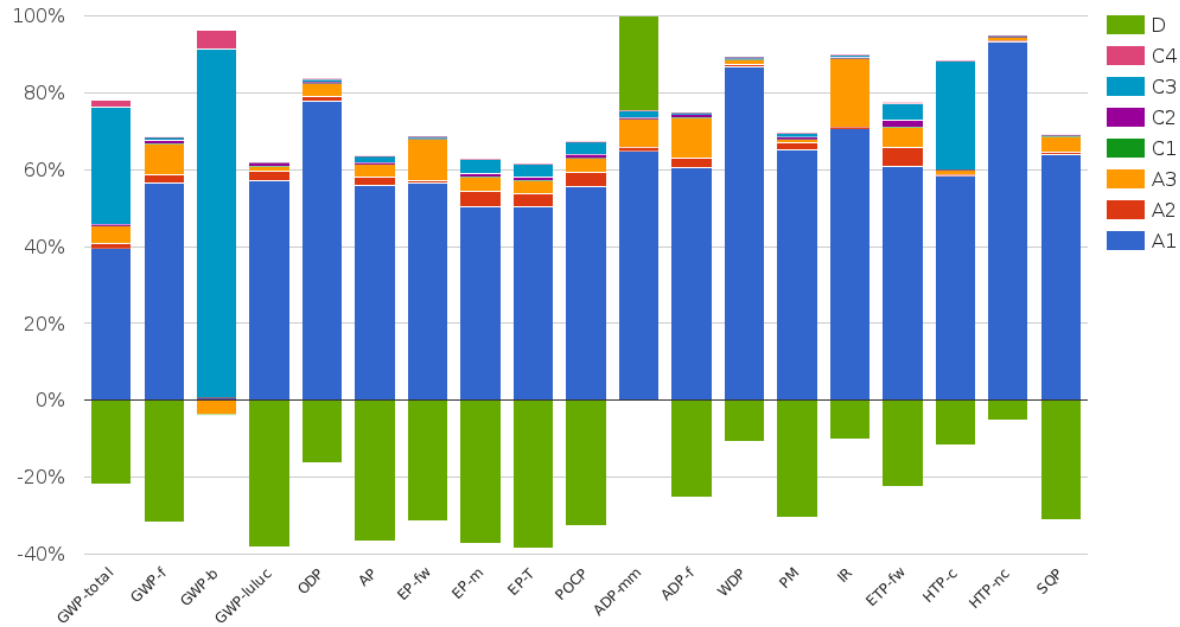

The results show that the product stage A1-A3 is the dominant life cycle phase across most environmental impact categories. The main contributors are raw material supply and manufacturing processes, particularly the production of HPL panels, aluminium components, fittings and the electricity consumption during manufacturing.

The end-of-life stages C1-C4 show relevant contributions, especially module C3, due to the waste treatment of HPL panel material and other components. Module C1 has no impact, as no additional inputs are required for deconstruction or demolition.

In GWP-total and GWP-biogenic, module C3 shows a noticeable contribution due to the release of biogenic carbon during end-of-life treatment of the panel material.

## 6 Interpretation of results

Overall, the environmental profile is primarily driven by material production and manufacturing energy use, while end-of-life treatment also has a noticeable influence.

## 7 References

### ISO 14040

ISO 14040:2006-10, Environmental management - Life cycle assessment - Principles and framework; EN ISO 14040:2006

### ISO 14044

ISO 14044:2006-10, Environmental management - Life cycle assessment - Requirements and guidelines; EN ISO 14044:2006

### ISO 14025

ISO 14025:2011-10, Environmental labels and declarations — Type III environmental declarations — Principles and procedures

### EN 15804+A2

EN 15804:2012+A2:2019/AC:2021, Sustainability of Buildings - Environmental Product Declarations - Framework Development Rules by Product Category

### Kiwa-EE GPI R.3.0 (2025)

Kiwa-Ecobility Experts, General Programme Instructions “Product Level”, SOP EE 1201\_R.3.0 (03.06.2025)

### Kiwa-EE GPI R.3.0 Annex B1 (2025)

Kiwa-Ecobility Experts, General Programme Instructions “Product Level” – Annex B1 Environmental Information Programme according to EN 15804 / ISO 21930 , SOP EE 1203\_R.3.0 (03.06.2025)

### Ecoinvent

ecoinvent Version 3.9.1 (December 2022)

### R<THINK characterization method

ecoinvent 3.9.1: EN 15804+A1 indicators (CML-IA Baseline v3.09), EN 15804+A2 indicators (EF 3.1)

## 8 Contact information

Publisher	Operator	Owner of declaration
 <p><b>Kiwa-Ecobility Experts</b> Wattstraße 11-13 13355 Berlin, DE</p>	 <p><b>Kiwa-Ecobility Experts</b> Wattstraße 11-13 13355 Berlin, DE</p>	 <p><b>Schäfer Trennwandsysteme GmbH</b> Industriepark 37 56593 Horhausen, Germany , DE</p>
<p><b>E-mail:</b> DE.Ecobility.Experts@kiwa.com</p> <p><b>Website:</b> <a href="https://www.kiwa.com/de/en-de/areas-of-expertise/sustainable-solutions/ecobility-experts-epd-program/">https://www.kiwa.com/de/en-de/areas-of-expertise/sustainable-solutions/ecobility-experts-epd-program/</a></p>	<p><b>E-mail:</b> DE.Ecobility.Experts@kiwa.com</p> <p><b>Website:</b> <a href="https://www.kiwa.com/de/en-de/areas-of-expertise/sustainable-solutions/ecobility-experts-epd-program/">https://www.kiwa.com/de/en-de/areas-of-expertise/sustainable-solutions/ecobility-experts-epd-program/</a></p>	<p><b>E-mail:</b> info@schaefer-tws.de</p> <p><b>Website:</b> <a href="http://www.schaefer-tws.de">www.schaefer-tws.de</a></p>

Kiwa-Ecobility Experts is established member of the 